

## Portable power quality analysis center

### Features

- 7" touchscreen - ergonomic and intuitive graphical user interface.
- Over 10 years of recording.
- CAT IV 600 V measurement category - high safety.
- All parameters according to class S - high accuracy of measurements.
- Li-Ion rechargeable battery - higher mobility.
- Powering from measured network - reliability of measurements.
- Removable memory card - recording data with no restrictions.
- Quick setup and reporting - ease of use.
- Cooperation with desktop Sonel Analysis software - extended data analysis.

### Measured parameters

- Inrush current.
- Inverter efficiency.
- **Voltages L1, L2, L3, N, PE (five measurement inputs)** – average, minimum, maximum and instant values within the range up to 760 V, interoperability with voltage transducers.
- **Currents L1, L2, L3, N (four measurement inputs)** – average, minimum and maximum values, current measurement within the range up to 6 kA (depending on applied current clamp), interoperability with current transducers.
- Crest factors for current CFI and voltage CFU.
- Frequency within the range of 40...70 Hz.
- Active (P), reactive (Q), distortion (D) and apparent (S) power with the type of reactive power (capacitive and inductive).
- Active ( $E_p$ ), reactive ( $E_q$ ) and apparent ( $E_s$ ) energy.
- Power factor PF,  $\cos\phi$ ,  $\tan\phi$ .
- Harmonics up to the 50<sup>th</sup> order of voltage and current.
- Event logging for current and voltage along with oscillograms and half-period RMS charts.
- Energy cost calculator.
- ...and much more.
- **All parameters are recorded in compliance with class S according to IEC 61000-4-30 standard**



## Wide range of mains to analyze

- With rated frequency 50/60 Hz
- With rated voltages: 58/100 V, 64/110 V, 110/190 V, 115/200 V, 120/208 V, 127/220 V, 133/230 V, 220/380 V, 230/400 V, 240/415 V, 254/440 V, 290/500 V, 400/690 V
- Direct current
- Systems:
  - » single-phase
  - » split-phase with common N
  - » three-phase – WYE with and without N conductor
  - » three-phase – Delta
  - » three-phase – WYE and Delta Aron
  - » with current and voltage transducers



## Capabilities

PQM-707 is an autonomous meter allowing versatile measurement, analysis, and registration of energy network (DC and 50/60 Hz) parameters. All parameters are measured I/A/W class S of the IEC 61000-4-30 standard guaranteeing high accuracy of measurements. The **7-inch colour touchscreen** - The largest in this class of analyzers! - enables intuitive and ergonomic operation. Thanks to the built-in lithium-ion battery, the analyzer allows for efficient work during the measurement without the necessity of connecting an external AC adapter.



## Displaying data

The analyzer is equipped with a readable colour touchscreen. Its **800 x 480 pixel** resolution provides both high comfort of interacting with the interface and high readability of the measurement results. **The included stylus allows you to work with dielectric gloves.**



## Application

The analyzer is directed to a very wide range of users, with particular reference to the maintenance staff. Due to its mobility and autonomy, any problems occurring in the supply networks can be diagnosed on the spot. The analyzer can be used in virtually all kinds of networks with rated voltage from 54 V to 760 V - directly or indirectly via transducers. PQM-707 can be used in the field of professional power engineering, maintenance services in industrial plants, as well as among those providing services focused on network analysis.



## Durable and practical casing








The casing has been designed to allow easy access to the touchscreen and all measurement and communication sockets. Folding lid protects the display from damages. Thanks to the IP51 protection degree, the device can be used in difficult conditions - it is not afraid of dust or water splashes.

# Parameters

Parameter	Measuring range	Max. resolution	Accuracy
<b>Alternating voltage (TRMS)</b>	0.0...760.0 V	4 significant digits	$\pm 0.5\% U_{nom}$
<b>Crest Factor</b>			
Voltage	1.00...10.00 ( $\leq 1.65$ for 690 V)	0.01	$\pm 5\%$
Current	1.00...10.00 ( $\leq 3.6$ for $I_{nom}$ )	0.01	$\pm 5\%$
<b>Alternating current (TRMS)</b>	depending on clamp *	$0.01\% I_{nom}$	$\pm 0.2\% I_{nom}$ (error does not account for clamp error)
<b>Frequency</b>	40.00...70.00 Hz	0.01 Hz	$\pm 0.05$ Hz
<b>Active, reactive, apparent and distortion power</b>	depending on configuration (transducers, clamps)	4 significant digits	depending on configuration (transducers, clamps)
<b>Active, reactive and apparent energy</b>	depending on configuration (transducers, clamps)	4 significant digits	as power error
<b>cos<math>\phi</math> and power factor (PF)</b>	0.00...1.00	0.01	$\pm 0.03$
<b>tan<math>\phi</math></b>	0.00...10.00	0.01	depends on error of active and reactive power
<b>Harmonics</b>			
Voltage	DC, 1...50	as for alternating voltage True RMS	$\pm 0.15\% U_{nom}$ for m.v. < 3% $U_{nom}$ $\pm 5\%$ m.v. for m.v. $\geq 3\% U_{nom}$
Current	DC, 1...50	as for alternating current True RMS	$\pm 0.5\% I_{nom}$ for m.v. < 10% $I_{nom}$ $\pm 5\%$ m.v. for m.v. $\geq 10\% I_{nom}$
<b>THD</b>			
Voltage	0.0...100.0% (relative to RMS value)	0.1%	$\pm 5\%$
Current			$\pm 5\%$
<b>Flicker index</b>	0.40...10.00	0.01	$\pm 10\%$
<b>Unbalance factor</b>			
Voltage and current	0.0...10.0%	0.1%	$\pm 0,15\%$ (absolute error)
<b>Inrush current</b>			
Current	depending on clamp *	$0.01\% I_{nom}$	$\pm 4\%$ m.v. for m.v. $\geq 10\% I_{nom}$ $\pm 4\% I_{nom}$ for m.v. < 10% $I_{nom}$ (RMS <sub>1/2</sub> )

m.v. – measured value

\* F-1A1, F-2A1, F-3A1 clamp: 0...1500 A AC (5000 A<sub>pp</sub>) • F-1A, F-2A, F-3A clamp: 0...3000 A AC (10 000 A<sub>pp</sub>) • F-1A6, F-2A6, F-3A6 clamp: 0...6000 A AC (20 000 A<sub>pp</sub>)  
C-4A clamp: 0...1000 A AC (3600 A<sub>pp</sub>) • C-5A clamp: 0...1000 A AC/DC (3600 A<sub>pp</sub>) • C-6A clamp: 0..10 A AC (36 A<sub>pp</sub>) • C-7A clamp: 0...100 A AC (360 A<sub>pp</sub>)

	 <b>C-4A</b> WACEGC4AOKR	 <b>C-5A</b> WACEGC5AOKR	 <b>C-6A</b> WACEGC6AOKR	 <b>C-7A</b> WACEGC7AOKR	 <b>F-1A1 / F-1A / F-1A6</b> WACEGF1A1OKR WACEGF1AOKR WACEGF1A6OKR	 <b>F-2A1 / F-2A / F-2A6</b> WACEGF2A1OKR WACEGF2AOKR WACEGF2A6OKR	 <b>F-3A1 / F-3A / F-3A6</b> WACEGF3A1OKR WACEGF3AOKR WACEGF3A6OKR
<b>Rated current</b>	1000 A AC	1000 A AC 1400 A DC	10 A AC	100 A AC	1500 / 3000 / 6000 A AC		
<b>Frequency</b>	30 Hz...10 kHz	DC...5 kHz	40 Hz...10 kHz	40 Hz...1 kHz	40 Hz...10 kHz		
<b>Output signal level</b>	1 mV / 1 A	1 mV / 1 A	100 mV / 1 A	5 mV / 1 A	77.6 $\mu$ V / 38.8 $\mu$ V / 19.4 $\mu$ V 1 A		
<b>Max. diameter of measured conductor</b>	52 mm	39 mm	20 mm	24 mm	360 mm	235 mm	120 mm
<b>Minimum accuracy</b>	$\leq 0.5\%$	$\leq 1.5\%$	$\leq 1\%$	0.5%	1%		
<b>Battery power</b>	–	✓	–	–	–		
<b>Lead length</b>	2.2 m	2.2 m	2.2 m	3 m	2.2 m		
<b>Measurement category</b>	IV 300 V	IV 300 V	IV 300 V	III 300 V	IV 600 V		
<b>Ingress protection</b>	IP40			IP67			

# SONEL ANALYSIS




Sonel Analysis software – application delivered as standard accessory, indispensable for working with PQM-series analyzers. It enables:

- analyzer configuration,
- data reading from logger,
- preview of network parameters in real time (with capability of reading via GSM modem),
- deletion of data in the analyzer,
- data presentation in tables,
- data presentation in charts,
- data analysis and generating reports in compliance with standard EN 50160 (reports) and other user defined reference conditions - also for PV micro-installations up to 50 kW, a breakdown for active power states  $P > 0$ ,  $P < 0$  and  $P = 0$  and taking into account the graphs  $Q_1 = f(U_1/U_n)$  and  $\cos\phi = f(P/P_n)$ ,
- independent support of multiple analyzers,
- analyzer firmware updates.

The software enables readout of selected parameters and their visualization in real time. These parameters are measured independently from the registration saved on the memory card. The user can view:



- charts of voltage and current progression (oscilloscope),
- charts of voltage and current over time,
- phasor diagram,
- measurements of multiple parameters,
- harmonics and harmonic powers (estimating the direction of harmonics),
- interharmonics.

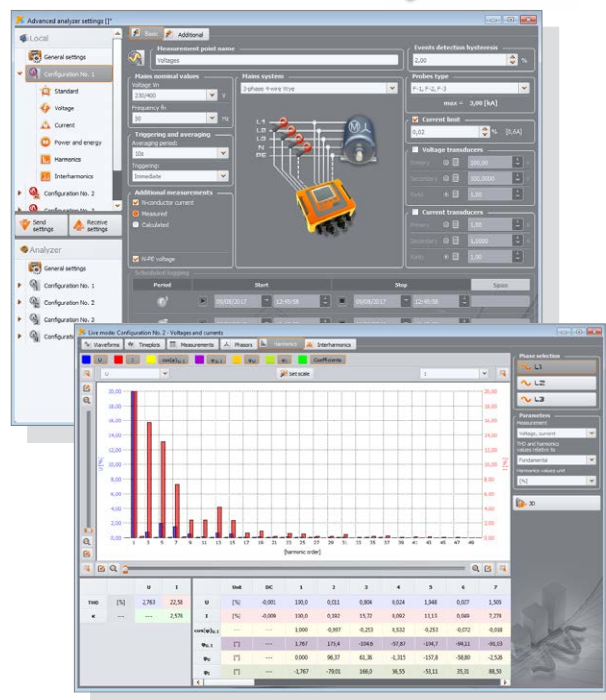

## REPORT: Micro-installations up to 50 kW ( $P > 0$ , power consumption)

### GENERAL INFORMATION

<b>Analyzer:</b>	Type: PQM-702   Version: FW1.50HwC   Serial number: AZ0025
<b>Report generated using:</b>	SONEL Analysis 4.6.0 BUILD 111
<b>Measurement time (UTC±00:00):</b>	Start: 2021-12-03 16:00:00.000 Stop: 2021-12-10 16:00:00.000 Time: 1w 0d 0h 0m 0s
<b>Number of parameter's samples averaged for every 5 s:</b>	120,960
<b>Number of parameter's samples averaged for every 10 min:</b>	1,008
<b>Number of parameter's samples averaged for every 15 min:</b>	672
<b>Number of parameter's samples averaged for every 2 h:</b>	84
<b>Number of excluded samples:</b>	0 (PLT: 0)
<b>Number of parameter's samples averaged for every 5 s (<math>P &gt; 0</math>, power consumption):</b>	L1 L2 L3 L123-N
<b>Number of parameter's samples averaged for every 10 min (<math>P &gt; 0</math>, power consumption):</b>	28,320 73,329 119,605 119,006
<b>Number of parameter's samples averaged for every 15 min (<math>P &gt; 0</math>, power consumption):</b>	243 682 1,002 994
<b>Number of excluded samples (<math>P &gt; 0</math>, power consumption):</b>	164 459 669 664
	0 0 0 0
<b>Nominal values:</b>	Mains system: 3-phase 4-wire Wye Phase voltage: 230.00 V Phase-to-phase voltage: 400.00 V Frequency: 50.00 Hz Inverter power (3-p): 30.00 kW Insensitivity threshold: 300.00 W
<b>Events limits:</b>	Swells %Un: 10.00 Dips %Un: -10.00 Interruptions %Un: -95.00

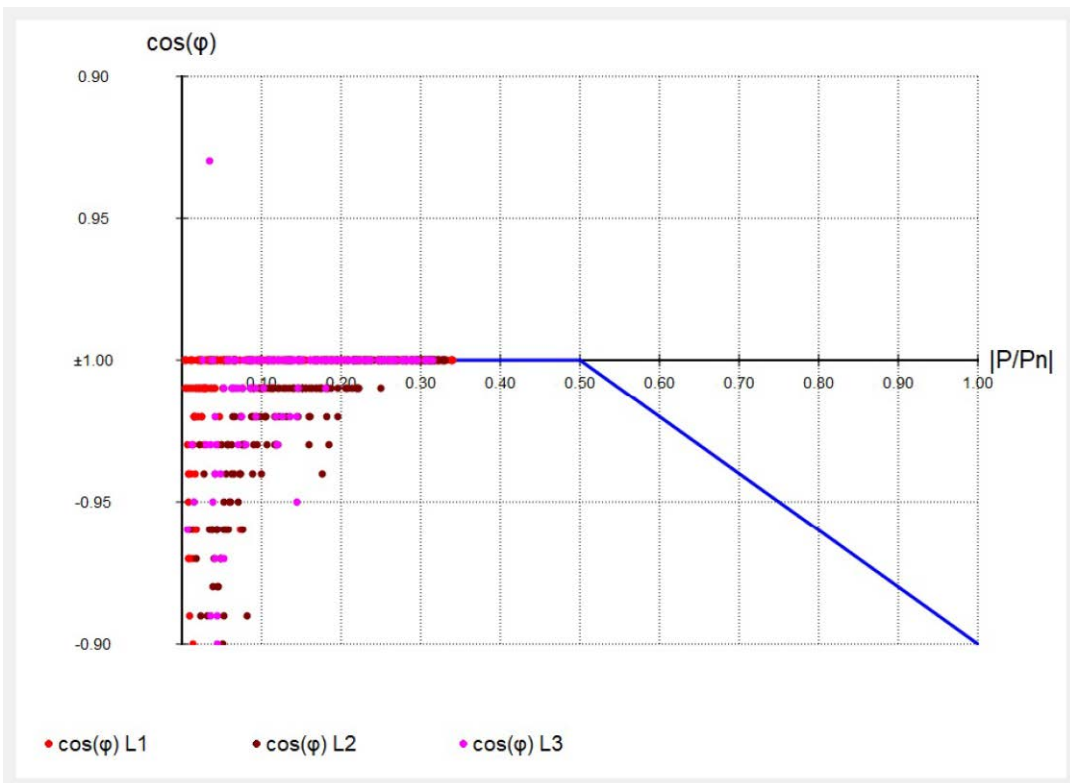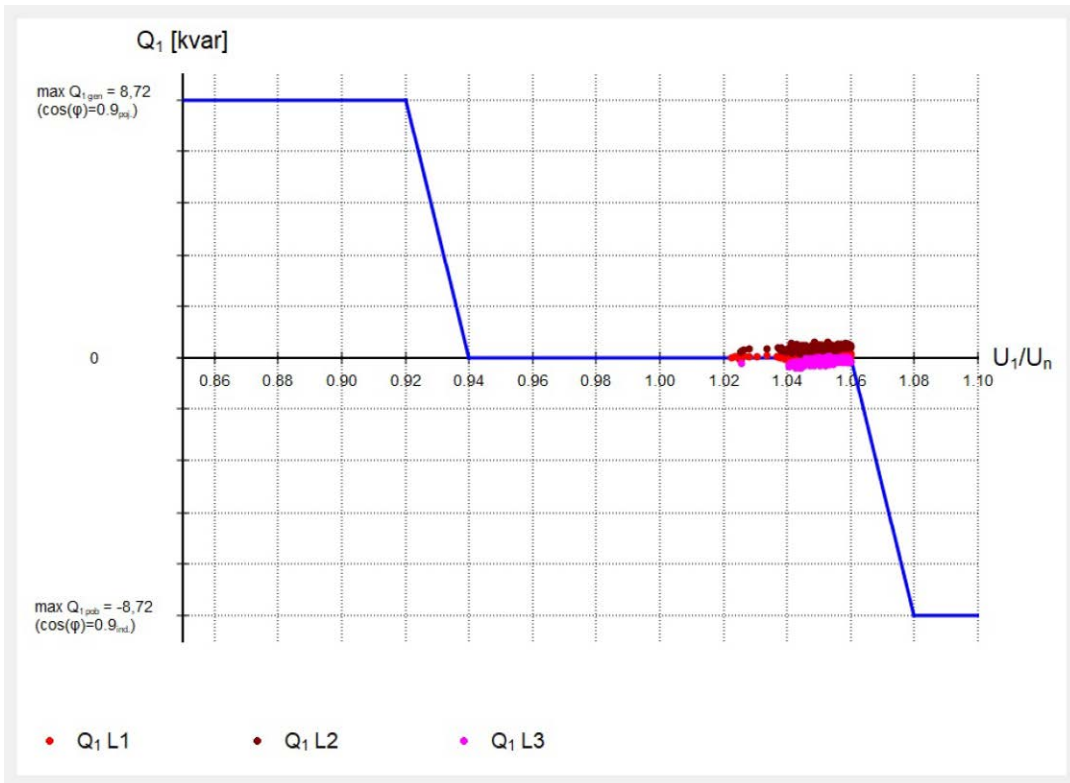

## Standard accessories



**3 x crocodile clip,  
black, 1 kV, 20 A**  
WAKROBL20K01

**2 x crocodile clip,  
red, 1 kV, 20 A**  
WAKRORE20K02



**Crocodile clip,  
blue, 1 kV, 20 A**  
WAKROBU20K02

**Crocodile clip,  
yellow, 1 kV, 20 A**  
WAKROYE20K02



**4 x F-3A flex-  
ible clamp  
(Ø=120 mm) 3 kA**  
WACEGF3AOKR



**Test lead with  
banana plugs;  
1 kV; 2.2 m; black**

L1  
WAPRZ2X2BLBBL1

L2  
WAPRZ2X2BLBBL2

L3  
WAPRZ2X2BLBBL3



**Test lead with ba-  
nana plugs;  
1 kV; 2.2 m**

blue  
WAPRZ2X2BUBB

yellow-green  
WAPRZ2X2YEBB



**4 x magnetic volt-  
age adapter - set**

WAADAUMAGKPL



**Li-ion recharge-  
able battery  
11.1 V 3.4 Ah**

WAAKU15



**AC-16 line splitter**

WAADAAC16



**Touchscreen pen**

WAPOZTPEN



**Storage & carrying**

**L-4 carrying case**  
WAFUTL4



**Meter strap  
(type L-2)**  
WAPOZSZEKPL



**Power supply**

Z-7 power supply  
WAZASZ7

AZ-2 power adapter  
(IEC C7 plug / banana  
plugs)  
WAAZAAZ2

230 V power cord  
(IEC C7 plug)  
WAPRZLAD230

Battery charging cable  
for 12 V car sockets  
WAPRZLAD12SAM



**Data transfer  
and analysis**


USB cable  
WAPRZUSB



**SoneI Analysis software**  
WAPROANALIZA4



**Factory calibra-  
tion certificate**

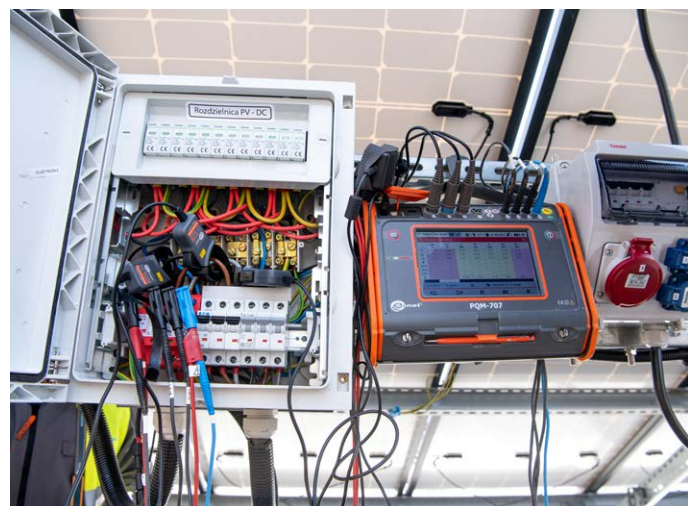

# Optional accessories



**F-1A flexible clamp**  
(Φ=360 mm)

1.5 kA: WACEGF1A10KR  
3 kA: WACEGF1A0KR  
6 kA: WACEGF1A60KR



**F-2A flexible clamp**  
(Φ=235 mm)

1.5 kA: WACEGF2A10KR  
3 kA: WACEGF2A0KR  
6 kA: WACEGF2A60KR



**F-3A flexible clamp**  
(Φ=120 mm)

1.5 kA: WACEGF3A10KR  
3 kA: WACEGF3A0KR  
6 kA: WACEGF3A60KR



**C-4A clamp**  
(Ø 52 mm)  
1000 A AC

WACEGC4A0KR



**C-5A clamp**  
(Ø 39 mm)  
1000 A AC/DC

WACEGC5A0KR



**C-6A clamp**  
(Ø 20 mm)  
10 A AC

WACEGC6A0KR



**C-7A clamp**  
(Ø 24 mm)  
100 A AC

WACEGC7A0KR



**L2 carrying case**  
for clamps

WAWALL2



**Magnetic volt-  
age adapter**

black  
WAADAUMAGKBL  
blue  
WAADAUMAGKB



**Pin probe, blue 1 kV**  
(banana socket)

black / blue / red / yellow  
WASONBLOGB1  
WASONBUOGB1  
WASONREOGB1  
WASONYEOGB1



**ASX-1 piercing  
adapter – set (4 pcs)**

WAADAPRZASX1KPL



**Voltage adapter  
with M4/M6  
thread - set 5 pcs**

WAADAM4M6



**Flat test clip**  
(grip - banana  
socket) (5 pcs)

WASONKCB1KPL



**Test clips with steel  
jaws – set (5 pcs)**

WASONKGB1KPL



**Adapter for control  
terminals (5 pcs)**

WAADAPRZKPL1



**AGT-16C three-  
phase socket adapt-  
er 16 A / 32 A (PEN)**

WAADAAGT16C  
WAADAAGT32C



**AGT-16P three-  
phase socket  
adapter 16 A / 32 A**

WAADAAGT16P  
WAADAAGT32P



**AGT-63P three-  
phase socket  
adapter 63 A**

WAADAAGT63P



**AGT-16T indus-  
trial socket adapter  
16 A / 32 A**

WAADAAGT16T  
WAADAAGT32T




**Cover with a  
magnetic strip  
(universal)**

WAPOZUCH8



**Calibration  
certificate with  
accreditation**



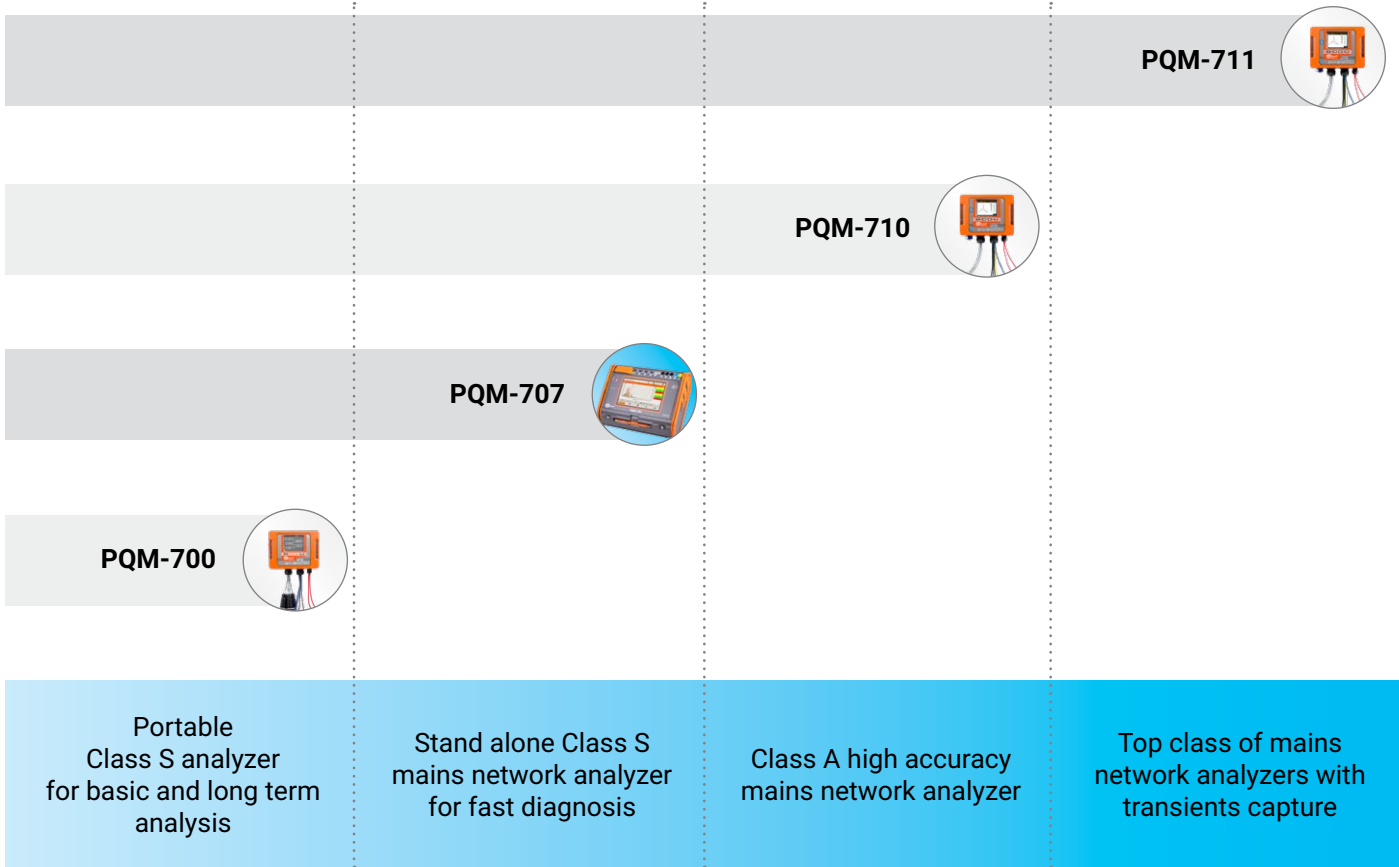

Get to know the instrument before buying

[www.sonel.com](http://www.sonel.com)

Expand your capabilities with additional accessories