



MIC-2511

index: WMGBMIC2511

SPD

testing surge protecting devices

FPA

measurements in EPA areas

1500 V

upper limit of voltage measurement



MeasureEffect™

CAT IV 600 V

CAT III 1000 V









For measurement of wiring in houses



For measurement of wires and cables



For measurement of pole transformer substations



For measurement of street lighting power cables



For measurement of telephone wiring



For measurements of pre-insulated pipes



For measurements of PV installations



For measurements in EPA areas

Measure insulation resistance up to 2 $T\Omega$

Features

- Measurement voltage within the range of 10...2500 V: selected from 10 V, 25 V, 100 V, 250 V, 500 V, 1000 V, 2500 V or 10...2500 V selected in steps of 10 V
- Insulation resistance measurements with a voltage of 10 V of the supervisory loop of fire alarm systems
- Testing surge protecting devices (SPD)
- Charts plotted on display during measurements
- Measurements in electrostatic protected areas (EPA)
- Correction of insulation resistance result to reference temperature
- Continuous reading of measured insulation resistance or leakage current
- Automatic discharge of the measured object's capacitance upon completion of insulation resistance measurement
- Sound signaling of five-second time intervals, facilitating capture of time characteristics
- Timing of measurement times T₁, T₂ and T₃ for measurement of one or two absorption coefficients (Ab1, Ab2 or DAR, PI) within the range of 1... 600 s
- Automatic measurement of all resistance combinations of 3-, 4- and 5-core cords and power cords by means of the optional AutoISO-2511 adapter
- Reading of actual measurement voltage during measurement
- Measurement current ≤2 mA
- Protection against measurement of live objects
- Two- or three-lead method of insulation resistance measurement





Sonel MeasureEffect™

The meter is a part of the **Sonel MeasureEffect™** platform. It is a comprehensive system that enables you to take measurements, store and manage data, and provides multi-level control of your instruments.

Additional features

- Measurement of leakage current during measurement of R_{ISO}
- Capacitance measurement during measurement of R_{ISO}
- Low-voltage measurement of circuit continuity and resistance
- Temperature measurement (with the use of the optional ST-1 temperature probe)
- Measurement of direct and alternating voltages within the range of 0...1500 V
- 9999-entry memory, data transmission to PC via USB cable
- Power supplied by rechargeable battery
- Backlit keyboard
- The instrument meets the requirements laid down by standard EN IEC 61557



Application

This insulation resistance meter is a device with a wide range of applications. It may be successfully operated both in residential construction industry and for inspecting industrial systems or traction networks. Due to its characteristics – excellent performance, low power consumption from batteries, the option of charging during measurements, convenience of use and a high ingress protection level – it is often used by electricians working in maintenance teams, testing motors, cables, street lighting or at the construction and maintenance of photovoltaic systems. The device perfectly matches the needs of installers of telecommunications networks and operators of district heating networks, where the inspection of alarm system on insulated pipes is necessary.

Features


The meter may be used to measure the insulation resistance using test voltage up to 2500 V. When testing cables, it automatically discharges their load at the moment of completing the measurement. Together with the PRZ-2 (kit for measuring resistance in zones with ESD protection), it is a comprehensive tool for technicians dealing with the protection of plants against static electricity.



The device allows safety control of **residential, commercial and industrial electrical installations**. Measurements can be easily automated with **AutoISO-2511** adapter for automatic insulation resistance test of 3-, 4- and 5-conductor cables, without switching.

MIC-2511 allows user to measure the continuity of protective conductors and equipotential bondings with current exceeding 200 mA in both directions. The meter has a built-in voltmeter of AC and DC voltages in the range of up to $1500 \ V$.

Extensive memory allows the device to record and send to a computer nearly **10,000 measurement results**.



Communication and software

You can easily transfer measurement data to your computer via USB port. In order to generate a report on measurements for electric shock protection, use **Sonel Reports PLUS** software. Saving the downloaded data to the simplest formats and printing is provided by free **Sonel Reader** software.

page 2 / 6 sonel.com

Specifications

Insulation resistance measurement -

Measurement range acc. to EN IEC 61557-2 for $R_{ISOnom}/I_{ISOnom}...\le 2 T\Omega$ ($I_{ISO}=1.6$ mA)

| | 2 1Ω (I _{ISO} -1.0 IIIA) | IOI R _{ISOmin} -U _{ISOnom} /I _{ISOnom} S |
|---------------------------|-----------------------------------|---|
| Accuracy | Resolution | Range |
| | 0.1 kΩ | 0.0999.9 kΩ |
| | 0.001 ΜΩ | 1.0009.999 MΩ |
| | 0.01 MΩ | 10.0099.99 ΜΩ |
| ±(3% m.v. + 20 digits) | 0.1 ΜΩ | 100.0999.9 ΜΩ |
| ±(3 % 111.V. + 20 digits) | 0.001 GΩ | 1.0009.999 GΩ |
| | 0.01 GΩ | 10.0099.99 GΩ |
| | 0.1 GΩ | 100.0999.9 GΩ |
| | 0.001 ΤΩ | 1.0002.000 ΤΩ |
| | | |

Values of measured resistance depending on measurement voltage

| Measurement range |
|-------------------|
| 10 GΩ |
| 20 GΩ |
| 50 GΩ |
| 100 GΩ |
| 250 GΩ |
| 500 GΩ |
| 1.00 ΤΩ |
| 2.00 ΤΩ |
| |

DC and AC voltage measurement —

| Range | Resolution | Accuracy |
|---------|------------|-----------------------|
| 01500 V | 1 V | ±(3% m.v. + 2 digits) |

• frequency range: 45...65 Hz

Capacitance measurement -

| Range | Resolution | Accuracy |
|-------------|------------|-----------------------|
| 0999 nF | 1 nF | 1/E% 22 1 E digita) |
| 1.009.99 µF | 0.01 μF | ±(5% m.v. + 5 digits) |

Continuity test with current 200 mA

Measurement range acc. to EN IEC 61557-2: 0.10...999 $\boldsymbol{\Omega}$

| Range | Resolution | Accuracy |
|-------------|------------|------------------------|
| 0.0019.99 Ω | 0.01 Ω | 1/20/ m // 1 2 digita) |
| 20.0199.9 Ω | 0.1 Ω | ±(2% m.v. + 3 digits) |
| 200999 Ω | 1 Ω | ±(4% m.v. + 3 digits) |

Temperature measurement —

| Range | Resolution | Accuracy |
|--------------|------------|------------------------|
| -40.099.9°C | 0.1°C | ±(3% m.v. + 8 digits) |
| -40.0211.8°F | 0.1°F | ±(3% m.v. + 16 digits) |

Insulation resistance measurement in EPA areas -

| Range for U _n = 10 V | Resolution | Accuracy |
|---------------------------------|------------|------------------------|
| 0.0999.9 kΩ | 0.1 kΩ | |
| 1.09.999 ΜΩ | 0.001 ΜΩ | |
| 10.0099.99 ΜΩ | 0.01 ΜΩ | ±(8% m.v. + 20 digits) |
| 100.0999.9 ΜΩ | 0.1 ΜΩ | |
| 1.010.0 GΩ | 0.1 GΩ | |

| Range for U _n = 100 V | Resolution | Accuracy | |
|----------------------------------|------------|---------------------------|--|
| 0.0999.9 kΩ | 0.1 kΩ | | |
| 1.0009.999 ΜΩ | 0.001 MΩ | | |
| 10.0099.99 ΜΩ | 0.01 MΩ | ±(3% m.v. + 20 digits) | |
| 100.0999.9 ΜΩ | 0.1 ΜΩ | ±(3 % 111.v. + 20 digits) | |
| 1.0009.999 GΩ | 0.001 GΩ | | |
| 10.0099.99 GΩ | 0.01 GΩ | | |
| 100.0200.0 GΩ | 0.1 GΩ | ±(8% m.v. + 20 digits) | |

| Range for U _n = 500 V | Resolution | Accuracy | |
|----------------------------------|------------|--------------------------|--|
| 0.0999.9 kΩ | 0.1 kΩ | | |
| 1.0009.999 MΩ | 0.001 ΜΩ | | |
| 10.0099.99 ΜΩ | 0.01 ΜΩ | | |
| 100.0999.9 MΩ | 0.1 ΜΩ | - ±(3% m.v. + 20 digits) | |
| 1.0009.999 GΩ | 0.001 GΩ | | |
| 10.0099.99 GΩ | 0.01 GΩ | | |
| 100.0999.9 GΩ | 0.1 GΩ | ±(8% m.v. + 20 digits) | |
| 1000 GΩ | 1 GΩ | | |

Other technical data -

| type of insulation acc. to EN 61010-1 and EN IEC 61557 | double |
|---|--|
| measurement category acc. to EN IEC 61010-2-030 | |
| rated operating altitude ≤2000 m | CAT IV 600 V |
| rated operating altitude ≤3000 m | CAT III 600 V |
| degree of housing protection acc. to EN 60529 | IP65 |
| power supply of the meter | Li-Ion 10.8 V 3.5 Ah rechargeable battery |
| dimensions | 234 x 169 x 70 mm 9.2" x 6.6" x 2.8" |
| meter weight | ca. 1.3 kg ca. 2.9 lbs |
| storage temperature | -25°C+70°C -13°F+158°F |
| operating temperature | -20°C+50°C -4°F+122°F |
| humidity | 20%90% |
| reference temperature | +23°C ± 2°C |
| reference humidity | 40%60% |
| display | graphical 5" LCD |
| number of $R_{\rm ISO}$ measurements acc. to EN IEC 61557-2 with battery power supply | min. 600 |
| memory of measurement results | 9999 results |
| data transmission | USB |
| quality standard for design, construction | ISO 9001 |
| and manufacturing compliant with | ISO 14001, ISO 45001 |
| the device meets the requirements of | EN 61010-1, EN IEC 61557 EN IEC 61010-2-030 |
| the product meets EMC requirements (immunity for industrial environment) according to the following standards | EN IEC 61326-1 EN IEC 61326-2-2 |

page 3 / 6 sonel.com

Standard accessories

| WMPLI | MIC2511EPA | WMPLMIC2511 |
|--|------------|-------------|
| aliania a | | |
| Kit for measuring resistance in zones with ESD protection with space for meter WASONPRZ2MIC | 1 | |
| Shielded test lead with banana plugs, 5 kV, 1.8 m, black WAPRZ1X8BLBB | 1 | 1 |
| Test lead with banana plugs, 5 kV, 1.8 m, red WAPRZ1X8REBB | 1 | 1 |
| Test lead with banana plugs, 5 kV, 1.8 m, blue WAPRZ1X8BUBB | 1 | 1 |
| Black "crocodile" clip 11 kV 32 A WAKROBL32K09 | 1 | 1 |
| Red "crocodile" clip 11 kV 32 A WAKRORE32K09 | 1 | 1 |
| Blue "crocodile" clip 11 kV 32 A WAKROBU32K09 | 1 | 1 |
| Test probe with banana socket; 5 kV; black WASONBLOGB2 | 1 | 1 |
| Test probe with banana socket; 5 kV; red WASONREOGB2 | 1 | 1 |
| USB cable type C WAPRZUSBC | 1 | 1 |
| Li-lon 10.8 V 3.5 Ah rechargeable battery WAAKU29 | 1 | 1 |
| Z-32 power supply WAZASZ32 | 1 | 1 |
| USB-A/USB-C adapter WAADAUSBAUSBC | 1 | 1 |
| M-6 carrying case WAFUTM6 | | 1 |
| Strap WAPOZPAS6 | 1 | 1 |
| Factory calibration certificate | 1 | 1 |

page 4 / 6 sonel.com

Optional accessories



AutoISO-2511 adapter

WAADAAISO2511



CS-1 cable simulator

WAADACS1



CS-5kV calibration box

WAADACS5KV



Test lead 5 m / 10 m, black, 5 kV (banana plugs, shielded)

WAPRZ005BLBBE5K WAPRZ010BLBBE5K



Test lead 5 m / 10 m, red, 5 kV (banana plugs, shielded)

WAPRZ005REBB5K WAPRZ010REBB5K



Test lead 5 m / 10 m, blue, 5 kV (banana plugs, shielded)

WAPRZ005BUBB5K WAPRZ010BUBB5K

MIC-2511



Probe for measuring resistance in zones with ESD protection

WASONPRS2



L-7 carrying case

WAWALL7



PRS-1 resistance test probe

WASONPRS1



Probe for measuring resistance in zones with ESD protection with a case

WASONPRS2KIT



Kit for measuring resistance in zones with ESD protection

WASONPRZ2



MIC-2511 | Kit for measuring resistance in zones with ESD protection with space for meter

WASONPRZ2MIC



MIC-2511 EPA | M-6 carrying case

WAFUTM6

M-15 carrying case

WAFUTM15



Hanging strap

WAPOZSZE5

ST-1 temperature probe

WASONT1



Sonel Reader PC software

WAPROREADER




Sonel Reports PLUS software

WAPROREPORTSPLUS



Calibration certificate with accreditation

page 5 / 6 sonel.com

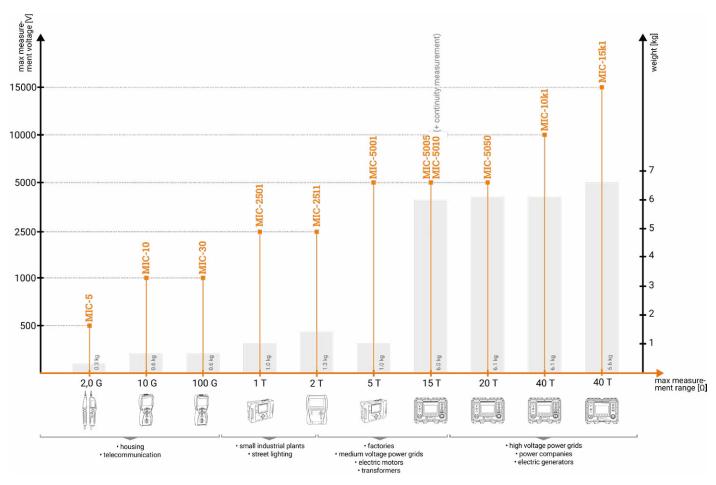



page 6 / 6 sonel.com